



# Li-MnO<sub>2</sub> Battery

## ----CR1025 Brief Datasheet----



### 1. BASIC SPECIFICATION

|   |   |
|---|---|
| ➤ Model:  | CR1025  |
| ➤ Nominal Voltage:  | 3.0Volts  |
| ➤ Nominal Capacity:                                       | (@0.1mA Discharge Current to 2.0V cut-off, +23°C) 30mAh |
| ➤ Standard Discharge Current:                             | 0.1mA   |
| ➤ Maximum recommended current under continuous discharge: | 0.5mA   |
| ➤ Maximum recommended current under pulse discharge:      | 5.0mA   |
| ➤ Operational temperature range:                          | -20°C~+60°C   |
| ➤ Nominal Weight:   | 0.6g  |

### 2. MAIN FEATURES

- Light Weight, High Voltage and High Energy Density
- Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics
- Outstanding Temperature Characteristics
- Excellent Leakage Resistance and Excellent Long-term Reliability

### 3. ELECTRICAL CHARACTERISTICS

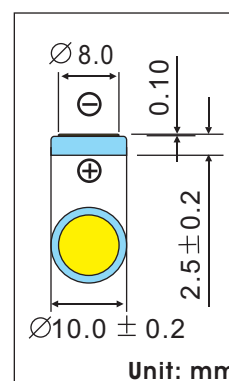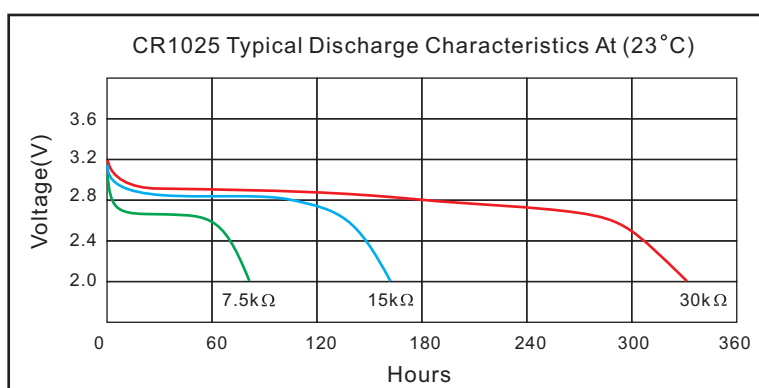

### 4. WARNING!

- DO NOT recharge, short-circuit, disassemble, deform, heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- Keep this battery out of the reach of children.
- When storing the battery or throwing it away, be sure to cover it with tape.

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.