



Li-MnO₂ Battery

----CR1225 Brief Datasheet----



1. BASIC SPECIFICATION

| | |
|---|---|
| ➤ Model: | CR1225 |
| ➤ Nominal Voltage: | 3.0Volts |
| ➤ Nominal Capacity: | (@0.2mA Discharge Current to 2.0V cut-off, +23°C) 50mAh |
| ➤ Standard Discharge Current: | 0.2mA |
| ➤ Maximum recommended current under continuous discharge: | 1.0mA |
| ➤ Maximum recommended current under pulse discharge: | 5.0mA |
| ➤ Operational temperature range: | -20°C~+60°C |
| ➤ Nominal Weight: | 1.0g |

2. MAIN FEATURES

- Light Weight, High Voltage and High Energy Density
- Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics
- Outstanding Temperature Characteristics
- Excellent Leakage Resistance and Excellent Long-term Reliability

3. ELECTRICAL CHARACTERISTICS

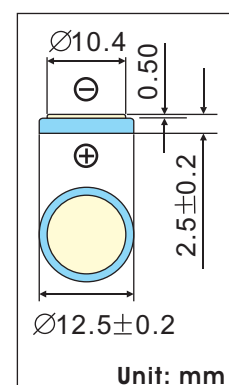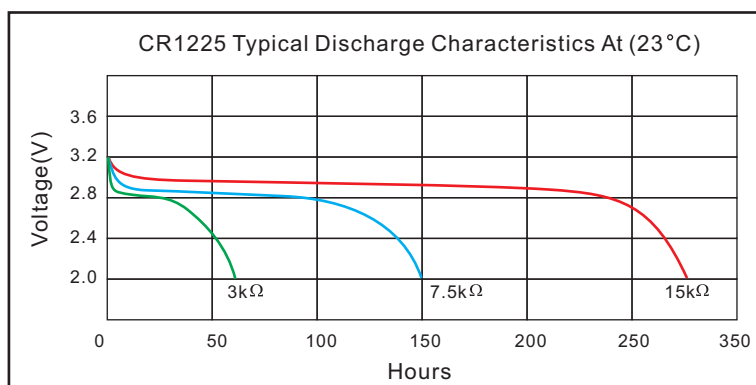

4. WARNING!

- DO NOT recharge, short-circuit, disassemble, deform, heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- Keep this battery out of the reach of children.
- When storing the battery or throwing it away, be sure to cover it with tape.