



Li-MnO₂ Battery

----CR2477T Brief Datasheet----



1. BASIC SPECIFICATION

➤ Model:	CR2477T
➤ Nominal Voltage:	3.0Volts
➤ Nominal Capacity:	(@ 1.0mA Discharge Current to 2.0V cut-off, +23°C) 1000mAh
➤ Standard Discharge Current:	1.0mA
➤ Maximum recommended current under continuous discharge:	5.0mA
➤ Maximum recommended current under pulse discharge:	30.0mA
➤ Operational temperature range:	-20°C~+60°C
➤ Nominal Weight:	10.0g

2. MAIN FEATURES

- Light Weight, High Voltage and High Energy Density
- Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics
- Outstanding Temperature Characteristics
- Excellent Leakage Resistance and Excellent Long-term Reliability

3. ELECTRICAL CHARACTERISTICS

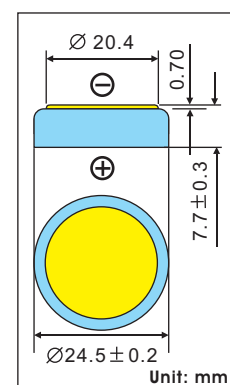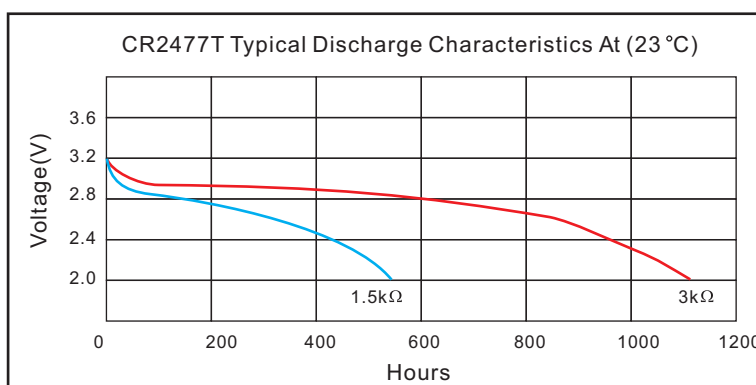

4. WARNING!

- DO NOT recharge, short-circuit, disassemble, deform, heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- Keep this battery out of the reach of children.
- When storing the battery or throwing it away, be sure to cover it with tape.